

External threaded shank adapters are generally more suitable for tunneling and extension drilling operations where high bending stresses are present, while internal threaded shank adapters are better suited for applications with limited drilling space and where the total feed length is critical.

Shank Adapters for Pneumatic Rail-Mounted Rock Drills

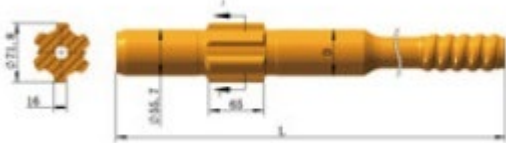
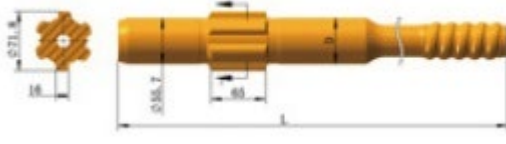
All shank adapters in this series are designed for pneumatic rail-mounted rock drills and can be produced with either external or internal threads as required. One end of the shank adapter connects to the rock drill, while the other end connects to the drill rod, making it a vital component between the rock drill and the drilling tools.

Technical Information of the Shank Adapter

- **Length:** 320 mm, 330 mm, 350 mm, and 380 mm
- **Diameter:** 32 mm
- **Thread type:** R32



rock drill shank adapter suitable for soosanstd machine

Soosan std11T	L mm	D mm	Thread	Order number	Weight kg
	620	56	T38	B496-5662-5176	7.4
	620	56	T45	B496-5662-5177	8.2
	620	56	T51	B496-5662-5178	8.5
	638	56	R38	B468-5663-5156	7.6
	650	56	T38	B468-5665-5176	7.6