

T45 extension drill rod with hex 38mm and round 46 mm

The shank of the T45 extension drill rod is hollow for delivering high-pressure air or water, which can blow rock debris and mud out of the hole, ensuring drilling efficiency and preventing the drill rod from getting stuck.

T45 Series Extension Drill Rods Overview

The mature design and manufacturing process of the T45 series extension drill rods ensure stable performance under harsh conditions and a long service life.

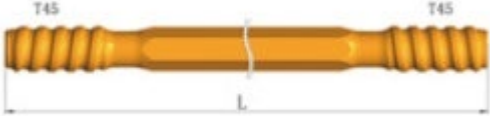
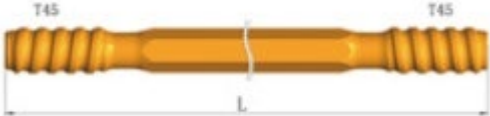
Specifications of T45 extension drill rods


- Male thread (external thread) T45 hexagonal 38 mm to male thread (external thread) T45.
- Male thread (external thread) T45 round 46 mm to male thread (external thread) T45.
- Female thread (internal thread) T45 round 46 mm to male thread (external thread) T45.
- Female thread (internal thread) T45 round 64 mm and 74 mm to male thread (external thread) T45 guide tube.

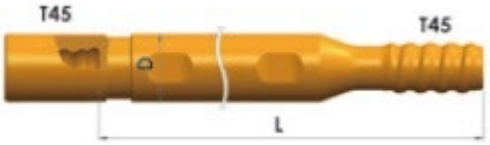


Technical information of T45 extension drill rods

- Length: 3050 mm, 3660 mm, 4265 mm, 6095 mm, etc.
- Weight: Ranges from 25.2 kg to 77.8 kg.
- Material: High-strength alloy structural steel, 23CrNi3Mo
- Manufacturing process: Forging, full carburizing, high-frequency treatment, and phosphating.

Extension rod	L (mm)	L (foot, inch)	D (mm)	D (inch)	Order number	Weight (kg)
T45-Hex38-T45 	3050	10'	38	1 1/2	B286-3830-7777	25.2
	3660	12'	38	1 1/2	B286-3836-7777	30.4
T45-Round46-T45 	3050	10'	46	1 3/4	B280-4630-7777	34.0
	3660	12'	46	1 3/4	B280-4636-7777	41.0
	4265	14'	46	1 3/4	B280-4642-7777	47.9

Extension rod	L (mm)	L (foot, inch)	D (mm)	D (inch)	Order number	Weight (kg)
	6095	20'	46	1 3/4	B280-4660- 7777	68.9
T45-Round46-T45 MF rod 	3050	10'	46	1 3/4	B290-4630- 7777	37.6
	3660	12'	46	1 3/4	B290-4636- 7777	43.5
	4265	14'	46	1 3/4	B290-4642- 7777	51.5
	5335	17', 6 1/8"	46	1 3/4	B290-4653- 7777	61.8

Extension rod	L (mm)	L (foot, inch)	D (mm)	D (inch)	Order number	Weight (kg)
	6095	20'	46	1 3/4	B290-4660-7777	70.6
T45-Round64(76)-T45 Guide tube 	3660	12'	64	2 1/2	B200-6436-7777	49.0
	3660	12'	76	3	B200-7636-7777	77.8