

threaded drill bit adapter rod coupler R32 R38 T38 T45 T51

The threaded drill bit adapter rod coupler features R32, R35, R38, T38, T45, and T51 threads, allowing conversion between different thread specifications. This enables secure and vibration-resistant connections, improves energy transfer efficiency, and reduces connector wear.

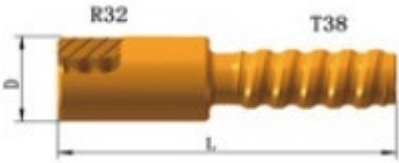

Threaded Drill Bit Adapter Rod Coupler Overview



The threaded drill bit adapter rod coupler is precisely designed and manufactured through precision CNC machining.

Technical Information

- **Thread connection types:** Available in R32 to T38, R32 to R38, T35 to R32, R35 to R32, T38 to R32, R32 to T38, R38 to R32, T38 to T45, R38 to T45, T45 to T38, and T45 to T51.
- **Length:** Available in 225 mm, 235 mm, 245 mm, 260 mm, and 280 mm.
- **Diameter:** 45 mm, 49 mm, 55 mm, 65 mm, and 72 mm.
- **Material:** Forged high-strength alloy steel
- **Manufacturing process:** Full carburizing heat treatment
- **Weight:** 1.5 kg to 3.9 kg



Bit adapter	L (mm)	L (inch)	D (mm)	D (inch)	Thread	Order number	Weight (kg)
Bit adapter 	225	8 7/8	45	1 47/64	R32, T38	B313-4522-5476	1.5
	225	8 7/8	45	1 47/64	R32, R38	B313-4522-5456	1.5
Bit adapter 	225	8 7/8	49	1 16/15	T35, R32	B313-4922-7554	1.9
	225	8 7/8	49	1 15/16	R35, R32	B313-4922-5554	1.9
Bit adapter	245	9 5/8	55	2 5/32	T38, R32	B313-5524-7654	2.2

Bit adapter	L (mm)	L (inch)	D (mm)	D (inch)	Thread	Order number	Weight (kg)
	245	9 5/8	55	2 5/32	R38, R32	B313-5524-5654	2.2
Bit adapter	235	9 1/4	55	2 5/32	T38, T45	B313-5523-7677	2.4
	235	9 1/4	55	2 5/32	R38, T45	B313-5523-5677	2.4
Bit adapter	260	10 1/4	65	2 9/16	T45, T38	B313-6526-7776	2.9
	280	11	72	2 27/32	T45, T51	B313-7228-7778	3.9

Bit adapter	L (mm)	L (inch)	D (mm)	D (inch)	Thread	Order number	Weight (kg)
